

# Geometric Algebra for Optimal Control with Applications in Manipulation Tasks

Tobias Löw and Sylvain Calinon

**Abstract**—Many problems in robotics are fundamentally problems of geometry, which lead to an increased research effort in geometric methods for robotics in recent years. The results were algorithms using the various frameworks of screw theory, Lie algebra and dual quaternions. A unification and generalization of these popular formalisms can be found in geometric algebra. The aim of this paper is to showcase the capabilities of geometric algebra when applied to robot manipulation tasks. In particular the modelling of cost functions for optimal control can be done uniformly across different geometric primitives leading to a low symbolic complexity of the resulting expressions and a geometric intuitiveness. We demonstrate the usefulness, simplicity and computational efficiency of geometric algebra in several experiments using a Franka Emika robot. The presented algorithms were implemented in c++20 and resulted in the publicly available library *gafro*. The benchmark shows faster computation of the kinematics than state-of-the-art robotics libraries.

**Index Terms**—Geometric Algebra, Optimal Control, Model-Based Optimization

## I. INTRODUCTION

Robot manipulators are used within an increased diversity of environments and tasks, which leads to a large increase in not only the complexity of the surroundings but also in the systems, that need to be able to adapt to different situations. To ensure safe and efficient interaction the corresponding algorithms need to be fast and be based on accurate models of the environment, which makes it important to think carefully about the representations that are used. Many robotics problems are fundamentally problems of geometry, which is why a lot of recent research is focusing on representing and utilizing these geometric properties for solving a wide variety of problems more efficiently. Screw theory, Riemannian geometry, Lie algebra and dual quaternions are just a few examples of the different methods that have been proposed to be used in robotics. Traditionally the kinematics and dynamics of the robots are expressed in different algebras, including linear algebra, vector calculus and quaternion algebra. While quaternions offer a way to avoid the singularities caused by Euler angles, they do not contain position information and thus conversion operations between algebras are required. To address this limitation, dual quaternions were proposed to extend quaternions by a dual unit, resulting in a translation and rotation. We propose in this

The authors are with the Idiap Research Institute, Martigny, Switzerland and with EPFL, Lausanne, Switzerland. (tobias.loew@idiap.ch)

This work was supported by the State Secretariat for Education, Research and Innovation in Switzerland for participation in the European Commission's Horizon Europe Program through the INTELLIMAN project (<https://intelliman-project.eu/>, HORIZON-CL4-Digital-Emerging Grant 101070136) and the SESTOSENZO project (<http://sestosenzo.eu/>, HORIZON-CL4-Digital-Emerging Grant 101070310).

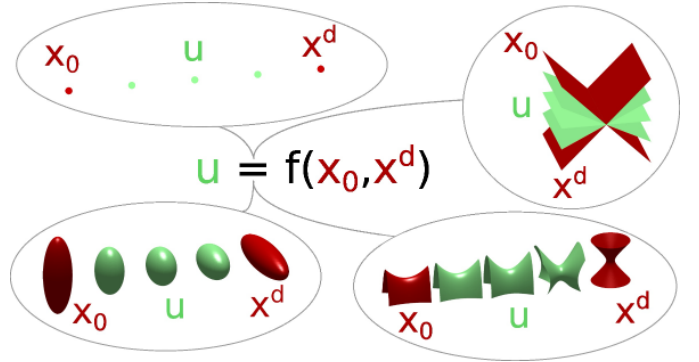


Fig. 1: A generic cost function in geometric algebra can consider different geometric primitives without changing its structure.

paper to use geometric algebra instead, which can be seen as a further unification and generalization of these concepts. In particular conformal geometric algebra is a direct extension of dual quaternions [1].

Geometric Algebra (GA) can be seen as a *high-level mathematical language* for geometry that unifies several known concepts, which makes it a very effective tool when the physics of a system need to be modeled. The roots of geometric algebra can be found in Clifford algebra, which was a unification of quaternions and Grassmann algebra [2]. The result was the geometric product, which is the sum of an inner and an outer product. This unfamiliar concept actually leads to algebraic tools that allow for the simplification of many otherwise complex equations, making them more intuitive to handle. A well-known example for this simplification are the Maxwell equations, which reduce to only a single equation in geometric algebra  $(\nabla + \frac{1}{c} \frac{\partial}{\partial t}) F = J$  [3].

GA is based on a multiplication operation called the geometric product, composed of an inner product and an outer product. The latter describes an oriented plane/volume that extends and generalizes the cross product that is restricted to only 3 dimensions. The resulting elements are called multivectors. This representation can be used to encode geometric primitives in a uniform manner (depicted in red in Figure 1), such as points, lines, planes, spheres, or quadric surfaces such as ellipsoids, as well as the associated transformations  $u$  to move from an initial state  $x_0$  to a desired state  $x_d$ , which are called motors (depicted in green in Figure 1). In robotics, these operations allow translations and rotations to be treated in the same way, without requiring us to switch between different algebras, as is classically done when handling position data

in a Cartesian space and orientation data as quaternions. Practically, GA allows geometric operations to be computed in a very fast way, with compact codes. In Figure 1, it means that  $u = f(x_0, x_d)$  can be described uniquely for the different geometric objects represented in the figure.

The representational advantage of geometric algebra is the geometric significance of its elements, meaning that an object can directly represent geometric primitives, such as lines, spheres and planes, as well as orthogonal transformations, such as rotations, translations, scaling and projections. This allows the direct extraction of geometric information about the problem from the equations. Furthermore, its elements, called multivectors, avoid the parameter redundancy of other representations such as matrices, leading to less memory consumption and optimized computation compared to analytic geometry or vector calculus, which makes it an amenable framework for real-time applications. In engineering the validity of equations is usually determined by a dimensional check of the quantities of the formula. These quantities are of a certain algebraic order when using geometric algebra, which adds a structural check for the validity. These properties were some fundamental criteria in the design of geometric algebra, along with the possibility to formulate basic equations in a coordinate-free manner and to smoothly transfer information between formalisms [4].

We want to show the versatility of geometric algebra and that it can be used as a single tool to solve a variety of problems due to its unification of concepts. Simultaneously, we want to make geometric algebra more accessible by enabling the usage of standard tools and solvers for minimizing cost functions that are expressed in geometric algebra. Our contributions are as follows:

- We extend the Lagrangian dynamics of serial manipulator in conformal geometric algebra to include a non-trivial inertia tensor and subsequently use the derived dynamics in an inverse dynamics control scheme.
- We propose the usage of geometric algebra to define objective functions for optimizations as they appear in inverse kinematics and optimal control problems for manipulation tasks and show the modeling of different geometric relations in an optimization problem, while keeping the structure of the cost function uniform.
- We demonstrate how geometric algebra formulations can be seamlessly used within existing frameworks based on linear matrix algebra by exploiting the sparsity of geometric algebra in order to facilitate its adoption.
- We provide an open-source library called *geometric algebra for robotics (gafro)* that implements all the presented formulations for robotics. The library is based on a fast and efficient custom implementation of conformal geometric algebra using expression templates. The benchmark shows faster computation of the kinematics than state-of-the-art robotics libraries.

This paper is organized as follows: Section II presents the related work, Section III introduces geometric algebra in a formal manner, Section IV gives a brief overview of optimal control, Section V explains how geometric algebra can be used

to compute the kinematics and dynamics of serial manipulators, Section VI introduces geometric algebra for optimal control and Section VII then shows the experiments. The source code of the library *gafro* as well as more information and accompanying videos can be found on our website <sup>1</sup>.

## II. RELATED WORK

The resurgence of geometric methods in robotics has spawned a variety of different approaches to formalize control, learning and optimization problems in robotics. These methods include screw theory, Riemannian geometry, Lie algebra and dual quaternions. A common motivation between these frameworks is the modeling of robot kinematics and dynamics, which is closely tied to representing rigid body transformations. Geometric algebra essentially presents a generalization and unification of these concepts and thus it is naturally connected to a large variety of recent work in robotics research.

Conceptually, geometric algebra can be seen as an extension and generalization of dual quaternions [5], since dual quaternions can be identified with a certain Clifford algebra, which forms the foundation of geometric algebra. The literature on dual quaternions is hence the most closely related to our work. Starting with formulating rigid body transformations, dual quaternion algebra offers efficient ways for blending them, which is useful in computer graphics [6]. In robotics, there have been various works describing the kinematics and dynamics of robots in dual quaternion algebra such as [7] and [8] that combine the geometric understanding of screw theory, the thoroughness of Lie Algebra and the simplicity of spatial algebra. Efficient control is an important aspect for using real robots and dual quaternions have been used to design admittance controller [9] and LQR controller for trajectory tracking [10]. Collision avoidance is an important aspect of control and in [11] vector field inequalities based on dual quaternions were proposed to handle them during surgical tasks.

Along with the regained interest of using geometric methods in robotics came various works proposing the use of differential and Riemannian geometry for learning and optimization problems. The topic of learning from demonstration often requires data to be represented as distributions, thus [12] presented how to use Gaussians on Riemannian manifolds. The manifold of semi-positive definite matrices has been used to study manipulability ellipsoids for learning robot skills [13]. In [14] a Riemannian metric was proposed that helps manipulators avoid singularities. Riemannian optimization is also used to solve the inverse kinematics problem of kinematic chains using distance geometry [15].

Geometric algebra has been applied successfully in a variety of different applications and fields. For example in the field of computer graphics, which started to re-popularize it, it found applications in mesh deformation [16] as well as ray casting and surface representation [17]. In the domain of image processing techniques for adaptive filtering have been devised [18], [19].

<sup>1</sup>[https://tloew.gitlab.io/geometric\\_algebra/](https://tloew.gitlab.io/geometric_algebra/)

A popular example in robotics to show the strengths of geometric algebra is solving the inverse kinematics problem. There have been various methods that proposed to utilize the geometric primitives and their intersection such as FABRIK [20] which finds an iterative solution and has also been extended to include model constraints [21]. Recently another extension, called FABRIKx [22], was proposed to address the inverse kinematics problem of continuum robots. A similar approach that finds a closed-form solution using the geometric primitive intersection has been described in [23] and [24] presented the differential and inverse kinematics of robots using conformal geometric algebra.

Recent work has approached the topic of formulating constrained dynamics in conformal geometric algebra [25] and the works in robotics also include using the motor algebra for modeling and control of robot arms [26] as well as Newton-Euler modeling of a multi-copter [27]. The interpolation of motors, i.e. rigid body transformations, has been shown to have useful applications in surgical robotics to model and plan surgical paths using virtual reality [28]. Conformal geometric algebra was presented for robust pose control of manipulators in [29] and [30] used it for robot object manipulation.

Apart from our theoretical contributions we also provide an open-source library that implements all the presented formulations and algorithms. To this end we have implemented the geometric algebra from scratch using expression templates. There have been various works that published implementations of geometric algebra such as GATL [31], GARAMON [32], Gaigen [33], TbGAL [34], GAL [35] and Versor [36]. These libraries all have in common that they are meant to be generic geometric algebra implementations focusing on the computational and mathematical aspects of the algebra itself. In contrast to that our implementation is targeted specifically at robotics applications and thus not only implements the low-level algebraic computations but also features the computation of the kinematics and dynamics of serial manipulators as well as generic cost functions for optimal control. We therefore have a similar objective as the DQ robotics [37] library, but using the more general conformal geometric algebra as opposed to dual quaternions.

### III. GEOMETRIC ALGEBRA

In this section we will give a brief introduction to geometric algebra with a focus on the specific variant known as conformal geometric algebra (CGA). We will be using the following notation throughout the paper:  $x$  to denote scalars,  $\mathbf{x}$  for vectors,  $\mathbf{X}$  for matrices,  $X$  for multivectors and  $\mathcal{X}$  for matrices of multivectors.

Geometric algebra is a single algebra for geometric reasoning, alleviating the need of utilizing multiple algebras to express geometric relations [38]. The core idea of geometric algebra is its multiplication operation called the geometric product

$$ab = a \cdot b + a \wedge b, \quad (1)$$

which is the sum of an inner  $\cdot$  and an outer  $\wedge$  product [39].

The resulting algebra essentially includes  $\mathbb{R}$  and the subspaces of the associated vector space as elements of computations [40]. Hence, let  $\mathbb{R}^{p,q,r}$  be a vector space, where

$p, q$  and  $r$  are the number of basis vectors that square to 1, -1 and 0, respectively, i.e. the dimension of this vector space is  $n = p + q + r$ . The associated geometric algebra  $\mathbb{G}_{p,q,r}$  then has  $2^n = 2^{p+q+r}$  basis elements which are called blades. A general element in geometric algebra is called a multivector and is the linear combination of basis blades. This high dimension looks to be leading to an increased complexity, in practice, however, these multivectors usually are very sparse, a fact that we exploit in our implementation. Common variants of geometric include motor algebra  $\mathbb{G}_{3,0,1}^+$ , projective geometric algebra (PGA)  $\mathbb{G}_{3,0,1}$  and conformal geometric algebra (CGA)  $\mathbb{G}_{4,1,0}$  [41]. Dual quaternions can be identified with the Clifford algebra  $Cl_{0,3,1}^+$  [42], which means they are based on an algebra with a degenerate metric. Due to this many of the operations that we are presenting in this work are not possible in dual quaternion algebra.

In this paper we are using conformal geometric algebra (CGA) [43]. Conformal refers to angle-preserving transformations. It embeds the 3-dimensional Euclidean space  $\mathbb{R}^3$  into the 5-dimensional one  $\mathbb{R}^{4,1}$ . The corresponding geometric algebra  $\mathbb{G}_{4,1}$  introduces two null-vectors ( $e_0$  and  $e_\infty$ ) that essentially represent a point at the origin and a point at infinity. The 5-dimensional space means that CGA has 32 basis blades. An explanation of that structure can be found in Appendix A.

A point  $\mathbf{x}$  in Euclidean space  $\mathbb{R}^3$  is embedded into CGA by using the conformal embedding, which is bijective, meaning that any point  $\mathbf{x} \in \mathbb{R}^3$  can be uniquely identified with a point  $X \in \mathbb{G}_{4,1}$

$$X = \mathcal{C}(\mathbf{x}) = e_0 + \mathbf{x} + \frac{1}{2}\mathbf{x}^2 e_\infty. \quad (2)$$

Points are the basic geometric primitives that can be used to construct others by the spanning operation of the outer product. These geometric primitives are in general nullspace representations with respect to either the inner (IPNS) or the outer (OPNS) product, meaning that a geometric primitive is defined by the set of all Euclidean points that result in zero upon multiplication when embedded in CGA, i.e.

$$\text{IPNS: } \mathbb{N}\mathbb{I}_G(\mathbf{A}) = \{\mathbf{x} \in \mathbb{R}^3 : \mathcal{C}(\mathbf{x}) \cdot \mathbf{A} = 0\}, \quad (3)$$

$$\text{OPNS: } \mathbb{N}\mathbb{O}_G(\mathbf{A}) = \{\mathbf{x} \in \mathbb{R}^3 : \mathcal{C}(\mathbf{x}) \wedge \mathbf{A} = 0\}. \quad (4)$$

The IPNS and OPNS representations are connected by a duality relationship. Duality in this case means multiplication with the pseudoscalar  $I$ , the highest grade element of the algebra (i.e.  $I = e_{0123\infty}$  for CGA)

$$X^* = IX. \quad (5)$$

We refer to the OPNS as the primal space for its more convenient usage, which consequently makes the IPNS the dual representation, although both representations can be used to represent all geometric primitives. The primitives of conformal geometric algebra with their corresponding equations for construction can be found in Appendix B. These primitives can be extended when going to higher dimensional geometric algebras, for example,  $\mathbb{G}_{6,3}$  additionally introduces quadric surfaces like ellipsoids and hyperboloids [44] and the Quadric Conformal Geometric Algebra (QCGA)  $\mathbb{G}_{9,3}$  allows using arbitrary quadric surfaces [45].

Conformal geometric algebra provides an exception-free way of computing incidence relations between geometric objects [46]. This is achieved via the meet operator

$$Y = X_1 \vee X_2 = (X_1^* \wedge X_2^*)^*. \quad (6)$$

The resulting multivector retains a geometric meaning, e.g. when a line meets a sphere there are three possibilities:

- the line intersects the sphere, in which case  $Y$  is a point pair;
- the line is tangential to the sphere, which results in a single point;
- the line and the sphere are completely separate, resulting in an imaginary point that is related to the distance between the objects.

This geometric result is directly encoded in the result and no special cases need to be considered.

There are several geometric operations available in geometric algebra such as translations and rotations, but also dilations, reflections, projections and rejections. For brevity we only present rigid body transformations, i.e. translations and rotations, in this paper. Thorough introductions can be found in [3] and [47] and a survey of relevant research in [5] and [48].

#### A. Rigid Body Motions in Geometric Algebra

The elements that describe rigid body motions are called rotors, translators and more generally: motors. A general motor is hence composed of a translator and a rotor (we omit other conformal operations such as scaling in this introduction to geometric algebra in order to keep it short), i.e.

$$M = TR. \quad (7)$$

A motor applied to multivectors results in a sandwiching product, similar to how quaternions rotate vectors

$$Y = MX\widetilde{M}. \quad (8)$$

Both translators and rotors can be found with an exponential mapping of bivectors, i.e.

$$T = \exp\left(\frac{1}{2}(t \wedge e_\infty)\right) = 1 - \frac{1}{2}t \wedge e_\infty, \quad (9)$$

and

$$R = \exp\left(\frac{\theta}{2}B\right) = \cos\left(\frac{\theta}{2}\right) - \sin\left(\frac{\theta}{2}\right)B. \quad (10)$$

The bivectors are  $t \wedge e_\infty \in \text{span}\{e_{1\infty}, e_{2\infty}, e_{3\infty}\}$  and  $B \in \text{span}\{e_{23}, e_{13}, e_{12}\}$ , respectively. Rotors can be seen as isomorphic to quaternions, they are however more general and do not require the introduction of complex numbers.

The motors in geometric algebra form a group, which is an even sub-algebra  $\mathbb{M}$  of  $\mathbb{G}_{4,1}^+$

$$\mathbb{M} = \text{span}\{1, e_{23}, e_{13}, e_{12}, e_{1\infty}, e_{2\infty}, e_{3\infty}, \mathbf{I}_3 e_\infty\} \subset \mathbb{G}_{4,1}^+. \quad (11)$$

It forms a Lie group with an associated Lie algebra, which is the bivector algebra in the linear subspace  $\mathbb{B}$  that is defined as

$$\mathbb{B} = \text{span}\{e_{23}, e_{13}, e_{12}, e_{1\infty}, e_{2\infty}, e_{3\infty}\} \subset \mathbb{M}. \quad (12)$$

Since the motor group is a Lie group it is also a smooth manifold. The motor manifold  $\mathcal{M}$  can be found with the group constraint

$$\mathcal{M} = \left\{M \in \mathbb{M} : M\widetilde{M} = 1\right\}. \quad (13)$$

Motors are isomorphic to dual quaternions [47], which makes them also isomorphic to  $SE(3)$ . They represent, however, a more general concept of transformations that is valid in any dimension. Furthermore, due to their similarities with dual quaternions the same advantages over transformation matrices apply to motors as well, i.e. they require less memory and operations for multiplication compared to transformation matrices [49]. The motor manifold being a Lie group consequently makes the bivector algebra its Lie algebra. The operation that connects the motor manifold with the bivector algebra is the exponential map, and its inverse the logarithmic map

$$M = \exp(B) \iff B = \log(M). \quad (14)$$

The interpretation of the bivector is the representation of a dual line  $B = L^*$ . This essentially defines the screw axis of the motor. Note that  $L^*$  is the IPNS of a line and as such a 2-blade, i.e. a bivector [50]. The motor manifold therefore elegantly combines position and orientation. Having both position and orientation represented by one entity removes the need to switch between algebras for computation, e.g. linear and quaternion algebra. Using the motor manifold optimization problems can be solved as presented in [51].

Since the motors and the geometric primitives are part of the same algebra, the motors can be used to apply rigid body transformations to these primitives. This means that the primitives can be translated, rotated, reflected and scaled using angle-preserving transformations.

It has been shown in [28] that efficient interpolation between motors can be achieved via the bivector space, which is similar to SLERP. In this case the parameterized motor curve  $M(t)$  can be found as an interpolation in the bivector space of viapoint motors using the exponential and logarithmic map

$$M(t) = \exp\left(\sum_{j=1}^n w_j(t) \log(M_j)\right). \quad (15)$$

The weights need to fulfill  $\sum_{j=1}^n w_j = 1$  for each timestep, but can otherwise be chosen arbitrarily. In [16] this is exploited for mesh deformation.

## IV. OPTIMAL CONTROL

In this section we present a brief review of optimal control.

Optimal control is a well-known technique that deals with the problem of finding a control sequence that minimizes an objective function. This objective function encodes the requirements of the task as well as the constraints of the robot and the environment. Modelling these mathematically requires special care, since they will determine the quality of the resulting solution. Furthermore optimal control can be applied as solver to a model predictive control problem, which requires fast convergence in order to achieve acceptable real time control rates. We will show that by using the representations

of geometric algebra for geometric primitives improves the clarity of equations and thus reduces computational difficulties. The modelling of the cost functions becomes easier and is done uniformly across all different primitives and is done directly in the error vector as opposed to the precision matrix, which results in a low symbolic complexity of expressions and a geometric intuitiveness, i.e. geometric meaning can directly be inferred.

Discrete-time optimal control aims at finding a control sequence that minimizes the cost function

$$\min_{\mathbf{u}} L(\mathbf{x}, \mathbf{u}) = l_f(\mathbf{x}_N) + \sum_{k=1}^{N-1} l_k(\mathbf{x}_k) + \|\mathbf{u}\|_R^2. \quad (16)$$

A popular method to solve this problem is the iterative Linear Quadratic Regulator (iLQR) [52]. It solves the problem by linearizing the non-linear system around the current solution and by assuming a quadratic cost. The solution is then refined iteratively until convergence. We will be using iLQR to solve the problem in a model predictive control (MPC) fashion in the experiments. This means that we are solving the regulation problem at each timestep and apply only the first control command to the robot.

## V. GEOMETRIC ALGEBRA FOR SERIAL MANIPULATORS

In this section we present how geometric algebra can be used to express the kinematics and dynamics of serial manipulators. We do this while also explicitly drawing connections to the expressions and terminology of classical linear algebra.

### A. Forward Kinematics of Serial Manipulators

The forward kinematics of a kinematic chain of  $N$  joints can easily be defined using motors. Assuming that we only have revolute joints, the forward motor  $M(\mathbf{q})$ , given the configuration  $\mathbf{q}$ , can be computed with

$$M(\mathbf{q}) = \prod_{i=1}^N M_i(q_i) = \prod_{i=1}^N M_{F,i} R_i(q_i). \quad (17)$$

The constant joint-specific motors  $M_{F,i}$  represent the local frames of the joints with the rotation in that frame expressed by the rotor

$$R_i(q_i) = \exp\left(-\frac{1}{2}q_i B_i\right), \quad (18)$$

where the bivectors  $B_i$  essentially represent the rotation planes of the joints. These quantities can easily be found using e.g. DH-parameters [53].

We denote by  $M^k(\mathbf{q})$  the forward kinematics up the  $k$ -th joint, i.e.

$$M^k(\mathbf{q}) = \prod_{i=1}^k M_i(q_i) = \prod_{i=1}^k M_{F,i} R_i(q_i). \quad (19)$$

### B. Jacobians of Serial Manipulators

In the literature about serial kinematic chains one can generally find the distinction between two Jacobians: the geometric and the analytic Jacobian. In this section we will explain how these quantities translate to geometric algebra.

Using an arbitrary representation of the end-effector forward kinematics

$$\xi = \mathbf{f}(\mathbf{q}), \quad (20)$$

the analytic Jacobian is defined as the partial derivatives of the forward kinematic function  $\mathbf{f}(\mathbf{q})$  w.r.t. the joint angles

$$\mathbf{J}^A(\mathbf{q}) = \frac{\partial \mathbf{f}(\mathbf{q})}{\partial \mathbf{q}}, \quad (21)$$

and it relates the joint angle velocity to time-derivatives of the end-effector configuration using the given representation

$$\dot{\xi} = \mathbf{J}^A(\mathbf{q})\dot{\mathbf{q}}. \quad (22)$$

The geometric Jacobian on the other hand defines the relationship of the joint angle velocity to the linear and angular velocity of the end-effector in a certain coordinate frame

$$\begin{bmatrix} \mathbf{v} \\ \boldsymbol{\omega} \end{bmatrix} = \mathbf{J}^G(\mathbf{q})\dot{\mathbf{q}}. \quad (23)$$

The relationship between the analytic and the geometric Jacobians can be found by a representation specific mapping

$$\mathbf{J}^G(\mathbf{q}) = \mathbf{J}^M(\xi)\mathbf{J}^A(\mathbf{q}). \quad (24)$$

In geometric algebra the analytic Jacobian can be found as the derivative of the forward kinematics motor defined in Equation (17), i.e.

$$\mathcal{J}^A(\mathbf{q}) = \frac{\partial M(\mathbf{q})}{\partial \mathbf{q}} = \left[ \frac{\partial M(\mathbf{q})}{\partial q_1} \dots \frac{\partial M(\mathbf{q})}{\partial q_N} \right]. \quad (25)$$

The partial derivative of the forward motor w.r.t the  $i$ -th joint angle is

$$\frac{\partial M(\mathbf{q})}{\partial q_i} = M_1(q_1) \dots M_{F,i} \left( -\frac{1}{2} B_i \right) R_i(q_i) \dots M_N(q_N). \quad (26)$$

Similarly, the geometric Jacobian of a serial kinematic chain in geometric algebra can be found by transforming the rotation bivectors of each joint using the respective motor, i.e.

$$\mathcal{J}_j^G(\mathbf{q}) = [B'_1 \quad \dots \quad B'_j \quad \mathbf{0}], \quad (27)$$

with the rotation bivectors

$$B'_i = M_1 \dots M_{i-1} M_{F,i} B_i \widetilde{M}_{F,i} \widetilde{M}_{i-1} \dots \widetilde{M}_1. \quad (28)$$

From Equations (26) and (28) the relationship between the analytic and geometric Jacobians in geometric algebra can easily be derived as

$$\mathcal{J}_{kj}^G(\mathbf{q}) = -2\mathcal{J}_{kj}^A(\mathbf{q})\widetilde{M}^k(\mathbf{q}). \quad (29)$$

For the computation of the dynamics, the time derivative of the geometric Jacobian is also required and it can be found as

$$\dot{\mathcal{J}}^G(\mathbf{q}, \dot{\mathbf{q}}) = \begin{bmatrix} \dot{B}'_1 & 0 & 0 & \dots & 0 \\ \vdots & \dot{B}'_2 & 0 & \dots & 0 \\ \vdots & \vdots & \vdots & \vdots & 0 \\ \dot{B}'_1 & \dot{B}'_2 & \dot{B}'_3 & \dots & \dot{B}'_N \end{bmatrix}. \quad (30)$$

The required time derivatives of the rotation bivectors  $\dot{B}'_j$  can be found using

$$\dot{\mathcal{B}}'(\mathbf{q}, \dot{\mathbf{q}}) = \begin{bmatrix} \dot{B}'_1 \\ \vdots \\ \dot{B}'_N \end{bmatrix} = \mathcal{J}^\times(\mathbf{q})\dot{\mathbf{q}}, \quad (31)$$

with

$$\mathcal{J}^\times_{ij}(\mathbf{q}) = B'_i \times B'_j = 0.5(B'_i B'_j - B'_j B'_i), \quad (32)$$

where the operator  $\times$  is called the commutator product.

### C. Inverse Kinematics of Serial Manipulators

Using the expressions derived in Section V-B, the inverse kinematics problem for a serial kinematic chain can be formulated as an optimization problem on the motor manifold. The goal is to find the joint angles  $\mathbf{q}$  that minimize the following equation

$$\mathbf{q}^* = \arg \min_{\mathbf{q}} \left\| \log \left( \widetilde{M}_{\text{target}} M(\mathbf{q}) \right) \right\|_2^2. \quad (33)$$

The forward kinematics motor  $M(\mathbf{q})$  can be found using Equation (17). The expression  $\widetilde{M}_2 M_1$  can be understood as the shortest screw motion between two points on the motor manifold. The  $\log(\cdot)$  operation moves the problem to Bivector space, i.e. the Lie algebra of the motor manifold.

The Jacobian can be found as

$$\mathbf{J}_{\mathbb{B}}(\mathbf{q}) = \mathcal{E}^{\mathbb{B} \rightarrow \mathbb{R}^6} \left[ \frac{\partial}{\partial \mathbf{q}_i} \log \left( \widetilde{M}_{\text{target}} M(\mathbf{q}) \right) \right]. \quad (34)$$

Here  $\mathbf{J}_{\mathbb{B}}(\mathbf{q}) \in \mathbb{R}^{6 \times N}$  is a linear algebra matrix. The interpretation of  $\mathbf{J}_{\mathbb{B}}(\mathbf{q})$  is an embedding of the multivectors into a matrix algebra and exploiting their sparsity. The expression can be further untangled into

$$\mathbf{J}_{\mathbb{B}}(\mathbf{q}) = \mathbf{J}_{\mathcal{M} \rightarrow \mathbb{B}}(\mathbf{q}) \mathbf{J}_{\mathcal{M}}(\mathbf{q}). \quad (35)$$

$\mathbf{J}_{\mathcal{M}}(\mathbf{q}) \in \mathbb{R}^{8 \times N}$  is the embedding of the analytic Jacobian of Equation (25) multiplied by the target motor, i.e.

$$\mathbf{J}_{\mathcal{M}}(\mathbf{q}) = \mathcal{E}^{\mathcal{M} \rightarrow \mathbb{R}^8} \left[ \widetilde{M}_{\text{target}} \mathcal{J}^A(\mathbf{q}) \right]. \quad (36)$$

$\mathbf{J}_{\mathcal{M} \rightarrow \mathbb{B}}(\mathbf{q}) \in \mathbb{R}^{6 \times 8}$  can be understood as the Jacobian of the local parameterization from the motor manifold to the bivector space and hence is the Jacobian of the  $\log(\cdot)$  operation. The derivation of  $\mathbf{J}_{\mathcal{M} \rightarrow \mathbb{B}}$  can be found in Appendix D.

With Equation (34) the Gauss-Newton step becomes

$$\mathbf{q}_{k+1} = \mathbf{q}_k - \alpha \left( \mathbf{J}_{\mathbb{B}}(\mathbf{q})^\top \mathbf{J}_{\mathbb{B}}(\mathbf{q}) \right)^{-1} \mathbf{J}_{\mathbb{B}}(\mathbf{q})^\top \mathbf{f}(\mathbf{q}_k), \quad (37)$$

where  $\alpha$  is the line-search parameter. This shows how geometric algebra functions on the motor manifold can be optimized using classical methods by embedding the multivectors into a matrix algebra, which will be exploited later when defining the cost functions for optimal control problems in geometric algebra.

### D. Dynamics of Serial Manipulators

In classical linear algebra, the manipulator equation is found to be

$$\mathbf{M}(\mathbf{q})\ddot{\mathbf{q}} + \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} + \mathbf{g}(\mathbf{q}) = \boldsymbol{\tau} - \boldsymbol{\tau}_{\text{ext}}, \quad (38)$$

where  $\mathbf{M}(\mathbf{q})$  is known as the inertia or generalized mass matrix,  $\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})$  is representing Coriolis/centrifugal forces,  $\mathbf{g}(\mathbf{q})$  stands for the gravitational forces,  $\boldsymbol{\tau}$  is the vector of joint torques and  $\boldsymbol{\tau}_{\text{ext}}$  are the external torques.

In geometric algebra, Equation (38) can be transformed to a simplified version, which was shown in [38]. The influence of the link inertia in that work, however, was assumed to be a scalar constant, which of course is not accurate for real systems. Therefore we extend this equation by a joint position dependent inertia tensor and subsequently derive the necessary influence on the Coriolis/centrifugal forces. The elements of Equation (38) can be expressed as multivector matrices, where the generalized mass matrix becomes

$$\mathcal{M}(\mathbf{q}) = \mathcal{I}(\mathbf{q}) + \mathcal{V}^\top(\mathbf{q})\mathbf{m}\mathcal{V}(\mathbf{q}). \quad (39)$$

The scalar valued  $\mathbf{m}$  is an  $N \times N$  matrix that contains all link masses along its diagonal. The Coriolis/centrifugal forces become

$$\mathcal{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} = \dot{\mathcal{I}}(\mathbf{q}, \dot{\mathbf{q}}) + \mathcal{V}^\top(\mathbf{q})\mathbf{m}\dot{\mathcal{V}}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}}, \quad (40)$$

and the gravitational forces are

$$\mathcal{G}(\mathbf{q}) = \mathcal{V}^\top(\mathbf{q})\mathbf{m}\mathcal{G}. \quad (41)$$

The constant matrix  $\mathcal{G} \in \mathbb{G}_{4,1}^{N \times 1}$  contains the gravitational acceleration with the information about the direction. In the usual case, all elements therefore are equal to  $g\mathbf{e}_3$ . The recurring multivector matrix  $\mathcal{V}(\mathbf{q}) \in \mathbb{G}_{4,1}^{N \times N}$  can be found using the current centers of mass of the links  $X_j^{CoM}$  and the current axes of rotation of the joints, expressed as bivectors  $B'_k$ . An element of this matrix therefore becomes

$$\mathcal{V}_{j,k}(\mathbf{q}) = X_j^{CoM}(\mathbf{q}) \cdot B'_k. \quad (42)$$

The interpretation of this matrix is the computation of the lever arms of the centers of mass of the links w.r.t. each joint. Its time derivative can be found to be

$$\dot{\mathcal{V}}_{j,k}(\mathbf{q}, \dot{\mathbf{q}}) = \left( \mathcal{I}\mathcal{V}(\mathbf{q})\dot{\mathbf{q}} \right) \mathcal{J}^G(\mathbf{q}) + \left( \mathcal{I}\mathcal{X}^{CoM}(\mathbf{q}) \right) \dot{\mathcal{J}}^G(\mathbf{q}, \dot{\mathbf{q}}). \quad (43)$$

Note that  $\mathcal{I}$  in this case is an  $N \times N$  identity matrix, such that the expression  $\mathcal{V}(\mathbf{q})\dot{\mathbf{q}}$  becomes a square matrix instead of a vector. The same applies to the expression  $\mathcal{I}\mathcal{X}^{CoM}(\mathbf{q})$ , where the matrix  $\mathcal{X}^{CoM}(\mathbf{q}) \in \mathbb{G}_{4,1}^{N \times 1}$  contains all centers of masses of the links.

As mentioned, we are not assuming the inertia to be constant in this work, since we want to use the inverse dynamics control scheme in our experiments, which requires an exact computation. Therefore, we have derived the influence of the link inertia, given the current joint state  $\mathcal{I}(\mathbf{q})$ , as well as its time derivative  $\dot{\mathcal{I}}(\mathbf{q}, \dot{\mathbf{q}})$ . The inertia matrix can be found as a summation over the joint angles of the manipulator, accounting for the influence of each joint, i.e.

$$\mathcal{I}(\mathbf{q}) = \sum_{i=0}^N \mathcal{B}_i^\top \mathcal{I}(\mathcal{B}_i). \quad (44)$$

The bivector matrix  $\mathcal{B}_i$  is a  $1 \times N$  row-vector and contains the rotation generators of each joint w.r.t the current joint. The  $i$ -th element of  $\mathcal{B}_i$  can thus be found as

$$B_{i,j} = \tilde{R}_i(\mathbf{q}) \log^R \left( \mathcal{J}_{ij}^G(\mathbf{q}) \right) R_i(\mathbf{q}). \quad (45)$$

The expression  $\log^R(\cdot)$  in these equations stands for the logarithmic map of the rotor part of the motor that is the  $i$ -th element of the geometric Jacobian. It hence returns a bivector with non-zero elements corresponding to the basis blades  $e_{23}, e_{13}$  and  $e_{12}$ .

The time derivative of the inertia matrix thus follows as

$$\dot{\mathcal{I}}(\mathbf{q}, \dot{\mathbf{q}}) = \sum_{i=0}^N \mathcal{B}_i^\top \left( \mathcal{I}(\dot{\mathcal{B}}_i) + \tilde{R}_i(\mathbf{q}) \hat{B}_i^w R_i(\mathbf{q}) \right). \quad (46)$$

The time derivative of the rotation generators  $\dot{\mathcal{B}}_i$  can be found in the same way as the elements of  $\mathcal{B}_i$ , but using the time derivative of the geometric Jacobian

$$\dot{B}_{i,j} = \tilde{R}_i(\mathbf{q}) \log^R \left( \dot{\mathcal{J}}_{ij}^G(\mathbf{q}, \dot{\mathbf{q}}) \right) R_i(\mathbf{q}). \quad (47)$$

The variable  $\hat{B}_i^w$  from Equation (46) can be found as

$$\hat{B}_i^w = (I_3 B_i^w) \wedge \left( R_i(\mathbf{q}) \mathcal{I} \left( \tilde{R}_i(\mathbf{q}) I_3 B_i^w R_i(\mathbf{q}) \right) \tilde{R}_i(\mathbf{q}) \right). \quad (48)$$

Note that in this case  $I_3$  stands for  $e_{123}$ , which is the pseudoscalar of the Euclidean geometric algebra  $\mathbb{G}_3$ , which is a sub-algebra of CGA.  $B_i^w$  on the other hand is the bivector velocity that results from multiplying the geometric Jacobian with the joint velocity, i.e.  $B_i^w = \mathcal{J}_i^G(\mathbf{q}) \dot{\mathbf{q}}$ . The quantity  $I_3 B_i^w$  therefore is the angular velocity and is non-zero in  $e_1, e_2$  and  $e_3$ . The outer product in Equation (48) causes the quantity  $\hat{B}_i^w$  to be a bivector again, i.e. the elements  $e_{23}, e_{13}$  and  $e_{12}$  are non-zero.

In all the above equations  $\mathcal{I}(\cdot)$  expresses the inertia tensor being applied to a multivector or to each multivector element in the matrix case. The inertia tensor is a grade-preserving operation since it maps bivectors to bivectors [54].

Finally, we find the manipulator inverse dynamics equation in geometric algebra to be

$$\begin{aligned} \boldsymbol{\tau}(\mathbf{q}, \dot{\mathbf{q}}, \ddot{\mathbf{q}}) &= \boldsymbol{\tau}_{ext} + \mathcal{I}(\mathbf{q}) \ddot{\mathbf{q}} + \dot{\mathcal{I}}(\mathbf{q}, \dot{\mathbf{q}}) \\ &\quad + \mathcal{V}^\top(\mathbf{q}) \mathbf{m} \left( \mathcal{V}(\mathbf{q}) \ddot{\mathbf{q}} + \dot{\mathcal{V}}(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}} + \mathcal{G} \right), \end{aligned} \quad (49)$$

and consequently the forward dynamics of a serial manipulator can be expressed as

$$\begin{aligned} \ddot{\mathbf{q}}(\mathbf{q}, \dot{\mathbf{q}}, \boldsymbol{\tau}) &= \left( \mathcal{I}(\mathbf{q}) + \mathcal{V}^\top(\mathbf{q}) \mathbf{m} \mathcal{V}(\mathbf{q}) \right)^{-1} \\ &\quad \left( \boldsymbol{\tau} - \boldsymbol{\tau}_{ext} - \mathcal{V}^\top(\mathbf{q}) \mathbf{m} \left( \dot{\mathcal{V}}(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}} + \mathcal{G} \right) - \dot{\mathcal{I}}(\mathbf{q}, \dot{\mathbf{q}}) \right). \end{aligned} \quad (50)$$

In the experiments, we will validate these equations by employing an inverse dynamics control scheme on top of the MPC in order to convert the acceleration commands to torques.

## VI. GEOMETRIC ALGEBRA FOR OPTIMAL CONTROL

In this section we describe how geometric algebra can be used in optimal control problems. We first present its application to a pointmass and then show how it can be used for manipulators.

### A. Optimal Control on the Motor Manifold

Employing homogeneous coordinates in 4D geometric algebra effectively allows us to linearize rigid body motions in 3D Euclidean space. In order to exploit this useful property, we demonstrate how to solve reaching tasks for rigid body motion using the motor manifold. The linear system is defined in the linear 6-dimensional bivector space, i.e. the Lie algebra of the motor manifold. The state  $\mathbf{x}$  is defined to be the stacked vector of the parameter vectors  $\mathbf{b}$  and  $\dot{\mathbf{b}}$  of the bivector  $B$  and its time derivative  $\dot{B}$ , respectively. From this follows the definition of the linear dynamical system as

$$\mathbf{x}_{t+1} = \begin{bmatrix} \mathbf{b}_{t+1} \\ \dot{\mathbf{b}}_{t+1} \end{bmatrix} = \mathbf{A} \begin{bmatrix} \mathbf{b}_t \\ \dot{\mathbf{b}}_t \end{bmatrix} + \mathbf{C} \mathbf{u}_t, \quad (51)$$

where the command  $\mathbf{u}$  corresponds to bivector accelerations.

Using the optimal control formulation that was presented in Equation (16), we now need to define appropriate state costs based on geometric algebra. Naturally the inverse kinematics cost function that was presented in Section VII-C can be used in order to define pose targets for reaching motions. This cost function is therefore the most equivalent to classical methods using e.g. transformation matrices. Of course, when using this linear bivector system, the current motor  $M_t$  is not found using the forward kinematics, but instead using the exponential map, i.e.

$$M_t = \exp(B(\mathbf{b}_t)). \quad (52)$$

The corresponding cost function therefore becomes

$$l(\mathbf{x}_t) = \|\mathbf{e}(\mathbf{x}_t)\|_2^2 = \left\| \log \left( \tilde{M}_{\text{target}} M_t \right) \right\|_2^2. \quad (53)$$

Note that due to the logarithmic map that is used here, the error vector  $\mathbf{e}(\mathbf{x}_t)$  is the parameter vector of a bivector and is hence 6-dimensional as well. Since the motors include orientation as well as position, it essentially is an oriented pointmass system.

Apart from defining target poses using the motor manifold, geometric algebra additionally offers the possibility to define targets using its geometric primitives and the accompanying incidence relationships. We exploit the nullspace representations of the primitives for the formulation of the reaching objectives, more specifically we use the OPNS representation. By definition of the OPNS the outer product is zero for any point that is on a geometric primitive. The multivector valued error can therefore be defined as

$$E(\mathbf{q}) = X_d \wedge M_t X \tilde{M}_t, \quad (54)$$

with  $X = e_0$ , i.e. the point at the origin, in this case and  $X_d$  can be any geometric primitive that can be expressed in the algebra. It is important to highlight that other combinations are possible as well and  $X$  is not restricted to be a point, it can for example also be a line with  $X_d$  being a point, which will be shown later in the form of a pointing task for a manipulator. Note that the structure of equation remains the same regardless of the combination of primitives.

## B. Optimal Control for Serial Manipulators

In this section we are presenting the formulation of objective functions for optimal control problems with serial manipulators based on geometric algebra. Similarly to the previous section, the inverse kinematics cost function can be used to define target poses for a manipulator to reach. More interesting is to consider Equation (54) for manipulators, of course in this case the motor again corresponds to the forward kinematics function. Using  $X = e_0$  therefore means that the expression  $M(\mathbf{q})X\widetilde{M}(\mathbf{q})$  corresponds to the tip of the end-effector.  $X_d$  again is free to be any geometric primitive. In all cases the Jacobian can be found by applying the chain rule to the multivector expressions

$$\mathcal{J}^E(\mathbf{q}) = X_d \wedge \left( \mathcal{J}^A(\mathbf{q})X\widetilde{M}(\mathbf{q}) + M(\mathbf{q})X\widetilde{\mathcal{J}}^A(\mathbf{q}) \right), \quad (55)$$

where the  $\mathcal{J}^A(\mathbf{q})$  is the analytic Jacobian that was presented in Equation (25) and the reverse of a multivector matrix is defined as the element-wise multivector reverse.

Of course, depending on the combination of  $X$  and  $X_d$ , the resulting  $E(\mathbf{q})$  will represent a different geometric meaning, which can be seen by the different non-trivial blades it holds. It is, however, known a priori what the resulting non-trivial blades are. From this it follows that the embedding function  $\mathcal{E}$  actually becomes dependent on  $X$  and  $X_d$ , i.e.

$$\mathcal{J}^E(\mathbf{q}) = \mathcal{E}(X, X_d) \left[ \mathcal{J}^E(\mathbf{q}) \right]. \quad (56)$$

The purpose of the embedding function thus is the removal of the trivial blades of the multivector, i.e. removing the zero rows from the matrix. This is in line with the goal of keeping the representations compact to allow for efficient computation. Furthermore, the embedding now allows the usage of off-the-shelf tools for optimal control.

Note that in general no special cases, such as division by zero, need to be considered for here. The exception-free incidence property of conformal geometric algebra allows for the equations to be coded exactly as they are presented in this paper.

## VII. EXPERIMENTS

In this section we are presenting implementation details of the provided library *gafro* as well as benchmarks of the kinematics computation. Afterwards we show various experiments with the Franka Emika robot to demonstrate how geometric algebra can be used to model different tasks.


### A. Implementation Details

We implemented the presented robotics kinematics and dynamics algorithms along with cost functions for optimal control in c++20. This resulted in the library *gafro*, which is publicly available. In this section we are presenting this library on a high-level and highlight some of its features. A more in-depth presentation, exhaustive benchmarks and comparison to other libraries will be part of future work.


At the core of *gafro* is a custom implementation of conformal geometric algebra. It exploits the sparsity of the multivector by only storing the data blades that are non-zero

by the structure of the objects. The geometric, inner and outer products are implemented as expression templates, that are further exploiting this structure by only evaluating the elements of the resulting type that are known to be non-zero. The types are evaluated at compile time and the evaluation tree is constructed, which is then evaluated at runtime in a lazy fashion. One of our design goals for the library was the seamless integration with existing tools for robotics such as libraries for optimization and optimal control. To this end we used the Eigen library<sup>2</sup>, which is de facto the standard tool in robotics, to implement the sparse parameter vector of the multivectors.

Since this library implements robot kinematics and dynamics algorithms, we are comparing and benchmarking *gafro* against several libraries that are commonly used in robotics applications. These libraries include Raisim [55], Pinocchio [56] and KDL [57]. An excerpt of the benchmarking results can be found in Figure 2. As can be seen, our library can compute these important quantities considerably faster than the other libraries that are based on more classical methods and transformation matrices.

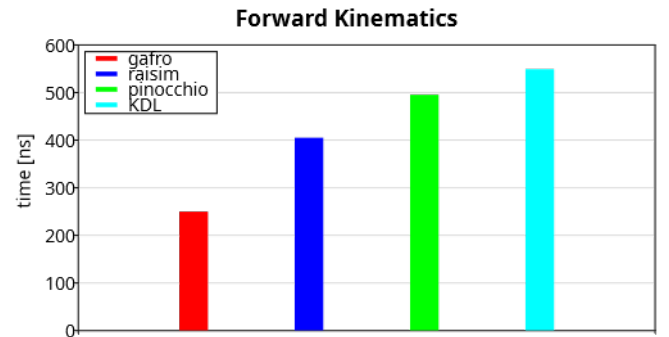

(a) Results for benchmarking the forward kinematics. The reference robotic system is the Franka Emika robot.

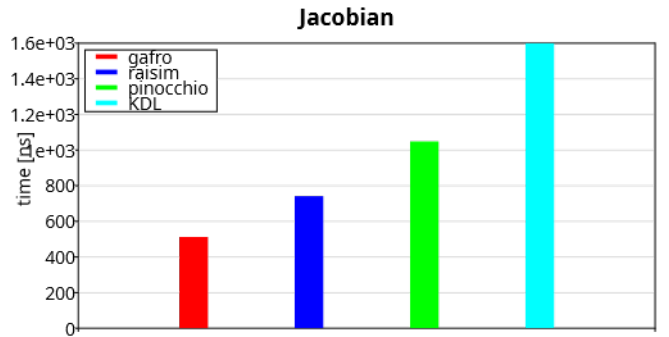

(b) Results for benchmarking the geometric Jacobian.

Fig. 2: Benchmarking results for *gafro* compared to Raisim, Pinocchio and KDL. The benchmarks were all performed on an AMD Ryzen 7 4800U CPU using the compiler flags `-O3 -mssse3 -march=native`. The presented results are the average of 10000 executions with 10 repetitions.

We want to point out that these benchmarks are preliminary results only, since there are some code optimizations that still need to be done. This especially applies to the computation

<sup>2</sup><https://eigen.tuxfamily.org>



of the dynamics that was presented in this paper. While it is possible to do real-time control with our implementation, it is still naive in the sense that algorithmic improvements of the implementation will make the computation faster. Both these issues will be addressed in future work that will be dedicated to the implementation details as well as an in-depth benchmarking against a wider range of libraries. At this point we will then also provide python bindings for the library.

### B. Torque Control of Serial Manipulators

The optimal control methods derived in Section IV are used in a model predictive control framework. In order to achieve fast, online computation we are employing a double integrator system in the joint space, which results in acceleration commands for the control of the manipulator. However standard practice is using torque commands, which means that we have to convert the accelerations to torques. This can be realized using an inverse dynamics controller, the required control command can thus be found as

$$\mathbf{u}_\tau = \boldsymbol{\tau}(\mathbf{q}, \dot{\mathbf{q}}, \ddot{\mathbf{q}}_d) + \mathbf{K}_p(\mathbf{q}_d - \mathbf{q}) + \mathbf{K}_d(\dot{\mathbf{q}}_d - \dot{\mathbf{q}}), \quad (57)$$

where the torque vector  $\boldsymbol{\tau}$  is computed as presented in Equation (49).  $\mathbf{K}_p$  and  $\mathbf{K}_d$  are the stiffness and damping gains, respectively.

While the formulation of the inverse dynamics controller is following standard practice, the computation of the torques  $\boldsymbol{\tau}(\mathbf{q}, \dot{\mathbf{q}}, \ddot{\mathbf{q}}_d)$  is done using the geometric algebra approach that was presented in Section V-D. The experiments on the real robot therefore not only show GA can be used for tracking different geometric primitives online with MPC, it also verifies the dynamics computation in GA. Most importantly it validates the non-trivial inertia matrix that we derived in this paper.

### C. Inverse Kinematics

In order to evaluate the numerical inverse kinematics using the motor formulation, we repeated the following experiment 10000 times. We sampled a random target from within the workspace of the Franka Emika robot and an initial joint configuration. Then using the standard Gauss-Newton approach that we also described in Section V-C, we computed the optimal solution. The resulting final cost was in the order of  $1 \times 10^{-10}$  on average and was found within 11.2 iterations, which corresponds to a time of 79  $\mu\text{s}$  on our system.

### D. Pointmass System

In Sections V-C and VI-A we first presented the cost function to minimize the difference between two motors and then optimal control for an oriented pointmass formulated as a linear system in the bivector space. Here we present an optimal trajectory for such a system using several target motors. This example of a control problem using several target motors along the trajectory is shown in Figure 3.

Note that the same objective can be formulated for manipulators as well, which would correspond to reaching target poses with the end-effector, which makes it similar to classical methods, albeit with a different mathematical formulation.

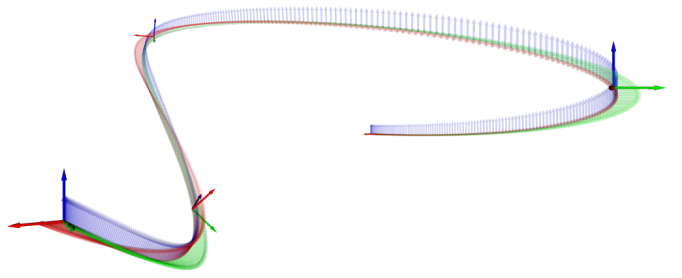


Fig. 3: Optimal trajectory for an oriented pointmass system. We placed four target motors along the trajectory at  $T/4$ ,  $T/2$ ,  $3T/4$  and  $T$ , respectively. The target motors are highlighted along the trajectory. The optimal trajectory was then found using the system defined in Equation (51) and the cost function from Equation (33).

Therefore we omit showing it for manipulators for brevity and concentrate on modeling and reaching tasks using the geometric primitives in the following sections.

### E. Reaching Tasks

Using the cost function formulation of geometric algebra that was presented in Equation (54) various reaching tasks can be defined. In general, for a reaching task, the end-effector should reach a certain position. This can be modeled by using a point for  $X$ . Then the desired multivector  $X_d$  can be any other geometric primitive, which in turn means that instead of only reaching a point, we can also reach lines, planes, circles and spheres. Higher order quadrics are possible as well, this however remains the subject of further investigations. We present optimal trajectories that were computed using the iterative linear quadratic regulator to explain how different geometric primitives can be reached using the same structure of the cost function, which is shown in Figure 4. In the experiments using the real Franka Emika we are then using nominal MPC, which results in an offset for the steady-state. This effect is expected but negligible in our work, since the focus of this paper are the modeling aspects. Since we are using an MPC framework we do not need to use fixed points for the reaching but can have movable targets. In practice we use Aruco markers to track the target online or we are disturbing the robot while it is moving.

1) *Reaching a Point*: Reaching a point means that the desired geometric primitive is a point, i.e.  $X_d = P$  in Equation (54). The reference primitive  $X_r$  is a point as well and represents the tip of the end-effector. Figure 4a shows an example trajectory for reaching a fixed point from a random initial configuration.

In the real robot experiments we used a single Aruco marker for reaching a movable point. For safety reasons the target point was set 10cm above the marker. We then moved the marker around allowing the robot to follow the reference. We present the results of the real experiment in Figure 5. In both plots that are presented we show the values of the 10-dimensional error vector that results from the outer product of two points. If the magnitude of this vector is zero it means that



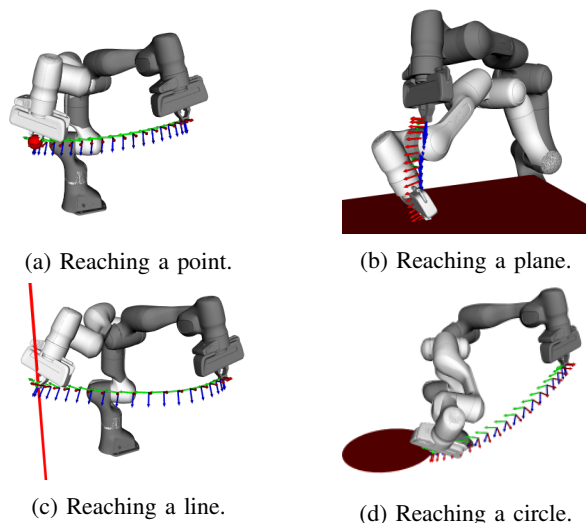


Fig. 4: Examples of optimal trajectories for reaching tasks using different geometric primitives. The initial configuration is always shown in gray and the final one in white. The target geometric primitive is shown in red. And the trajectory is depicted as the frames corresponding to the end-effector.

the reference point is in the nullspace of the desired point w.r.t to the outer product. In the case of points, this means that they are identical and the target is reached. Figure 5a presents the static case where we neither moved the point nor disturbed the robot while it moved. We did both of these in the plot shown in Figure 5b. It can be seen that the MPC controller is fast and reactive, reaching the targets in a stable manner.

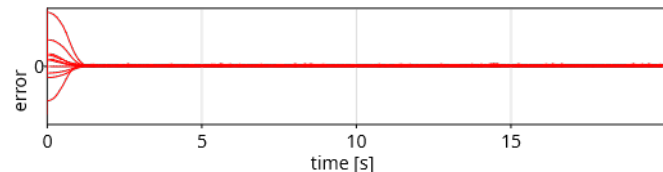

(a) Regulation of the end-effector to a target point using MPC without disturbing it. It can be seen that the offset that is induced by the nominal MPC is only very small.

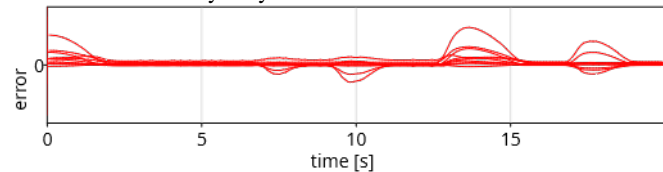

(b) Regulation of the end-effector to a target point using MPC while disturbing it.

Fig. 5: Error of reaching a fixed target point in MPC for a total duration of 20s. The individual lines show the elements of resulting 10-dimensional error vector that results from the outer product of two points.

Reaching a point is in this context a trivial example, since it can be easily done using classical methods as well, but it serves to show that reaching problems can be solved for all geometric primitives in the same way as they are solved for a point using geometric algebra.

2) *Reaching a Pointpair*: Using a pointpair as the target presents a special opportunity to model a control problem with options. A pointpair is the result of the outer product of two points. From this outer product nullspace representation, it follows that the outer product of the point pair and any point  $P = C(x)$  with  $x \in \mathbb{R}^3$  is zero if and only if  $P$  is identical to one of the points that constructed the pointpair.

The two possibilities are shown in Figure 6, where Figure 6a shows the robot reaching the first point and Figure 6b the second one. The point that is reached depends on the initial configuration and there are no conditional statements required. The corresponding Jacobian is thus always computed in the same way, i.e. as presented in Equation (55), and is valid without exceptions. The same is true for the other geometric primitives that we are considering here, but we wanted to specifically highlight the pointpair primitive due to its power to model a binary target.

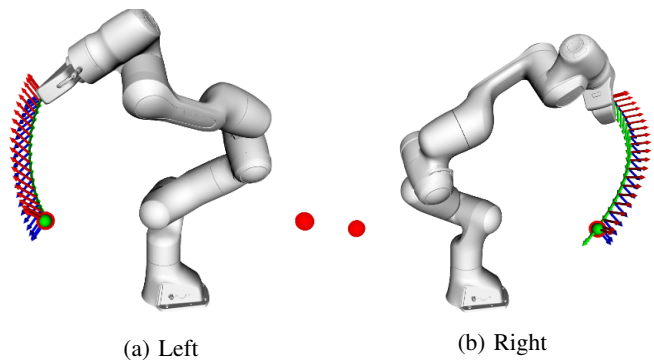


Fig. 6: Depending on the initial configuration, either the left or the right point of the pointpair is reached.

3) *Reaching a Plane*: A plane in geometric algebra is represented by three individual points and  $e_\infty$  using the outer product nullspace, i.e.  $X_d = E = P_1 \wedge P_2 \wedge P_3 \wedge e_\infty$ . Note that we do not need to know the orientation, i.e. its normal vector, of the plane in order to define it. It is sufficient to know three points that lie in the plane. When multiplying the plane with a point using the outer product, any point that lies in the plane will result in zero,  $E \wedge P = 0$  if  $P \in E$ . Equation (54) will therefore minimize the reaching motion to the plane from any random initial configuration as shown in Figure 4b.

4) *Reaching a Line*: A line is similar to a plane, but requires only two known points along the line in order to construct it. We show an optimal trajectory for reaching a line in Figure 4c. For the real robot experiment we again used an Aruco marker, in this case one construction point was on the marker and the other one was 10cm above it. The target line therefore always is perpendicular to the  $y-z$ -plane. In Figure 7 we show the results of the experiment. The corresponding error vector has 6 components and is geometrically equivalent to a circle.

5) *Reaching a Circle*: A target circle is constructed by the outer product of three points, i.e.  $X_d = C = P_1 \wedge P_2 \wedge P_3$ . These three points uniquely define the circle and no further knowledge about its radius or orientation is required (but both of these can of course be obtained from the circle for the visualization shown in Figure 4d). The target is here only the boundary of circle (not the full disc).

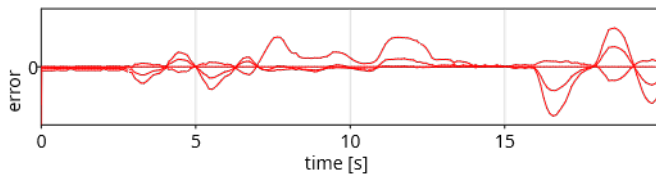


Fig. 7: Components of the error vector resulting from the outer product of a line and a point. Error of reaching a fixed target point in MPC for a total duration of 20s. The individual lines show the resulting error vector that results from the outer product of a line and a point.

#### F. Pointing Task

The modelling of a pointing task only requires the usage of a line instead of a point for  $X$  in Equation (54). A possible scenario where this task would be applied is tracking an object with a robot arm endowed with a camera. The line can in this case be interpreted as the line of sight of the camera. Again different geometric primitives can be used as the target, since the intersection of a line with any other primitive can be calculated in closed form without exceptions. The setup is shown in Figure 8. Figure 9 shows the moving target.




Fig. 8: optimal trajectory example for a pointing task. The target is shown as the red point. The pointing line is defined to be collinear to the  $z$ -axis of the end-effector frame. It is shown in green for the initial configuration and in blue for the final configuration.

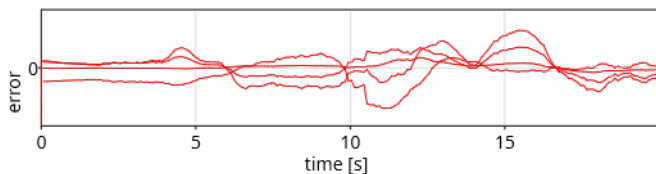


Fig. 9: Experimental results of the pointing task showing the components of the error vector during 20s. The Aruco marker representing the target point was constantly moved around, which is the reason why the error vector is more jittery than in other experiments.

#### G. Circular Object Grasping Task


In this task the goal is to give an object with a round opening to the robot. The setup is depicted in Figure 10. The opening is modeled as a circle, i.e. the robot can grasp

the object all around its opening. However, two additional constraints on the orientation are necessary to model this task. These constraints are shown in Figure 10a. The end-effector is required to be perpendicular to the plane that the circle lies in. A plane in geometric algebra can be obtained from a circle by a multiplying the circle with  $e_\infty$  and the normal vector is then obtained as

$$\mathbf{n}_E = E^* - 0.5(E^* \cdot e_0)e_\infty. \quad (58)$$

The second constraint is that the direction that the gripper is actuated in needs to be perpendicular to the circle, which expressed mathematically means that this direction needs to be coaxial with the line that connects the grasping position and the center of the circle when it is projected into the plane of the circle. The projection of a point  $P$  to the plane  $E$  is computed as

$$P' = (E \cdot P)E^{-1}. \quad (59)$$



(a) Constraints defining the circular object grasping task: 1) the green point representing the end-effector position needs to lie on the circle (i.e. the boundary of the red disc), 2) the green arrows representing the  $y$ -axis of the end-effector frame and the radial vector of the circle must be collinear, 3) the blue arrows representing the  $z$ -axis of the end-effector frame and the normal vector of the circle must be collinear and pointing in opposite directions.

(b) Franka Emika robot grasping a box with a circular opening. An Aruco marker is attached to the box to mark its location. The three points defining the circular opening are measured with respect to the marker frame.



Fig. 10: Experiment setup of the circular object grasping task.

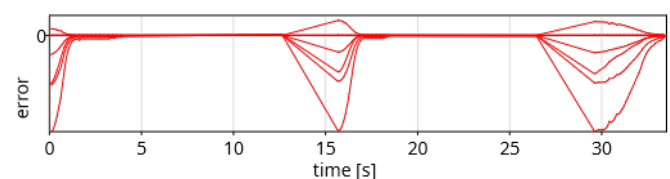


Fig. 11: Experimental results of the circular object grasping task. In this figure three repetitions are depicted, the location of the target box was changed in-between.

In Figure 10 we show the setup of the experiment with the Franka Emika robot. The box that we used has a circular opening and we defined it by measuring three points relative to an Aruco marker that we attached to the side of the box. Then during the experiment the robot was reaching for the box while satisfying the aforementioned constraints using MPC. As soon as it reached (i.e. the cost was below a threshold) the robot

closed its gripper in order to hold the box. We repeated this experiment multiple times and changed the box position by holding in our hands for giving it to the robot. An excerpt of the resulting error vector over time can be found in Figure 11.

### VIII. CONCLUSION

We presented in this paper the usage of geometric algebra for the modelling of optimal control tasks and how to use the dynamics of serial manipulators computed with geometric algebra for inverse dynamics control.

The provided library, *gafro*, is currently specialized for conformal geometric algebra. The implementation of the multivectors and expressions that define the algebra is generic. Thus it would be possible to use geometric algebras with different signatures, which can be used to explore the usage of different geometric primitives such as quadric surfaces in this optimal control framework.

Higher order quadric surfaces of e.g.  $\mathbb{G}_{6,3}$  or  $\mathbb{G}_{9,6}$  are still a topic of ongoing research. In theory it should be possible to use them seamlessly in combination with the methods that we presented in this paper, since the properties of the different geometric algebras such as the outer product nullspace, which we rely on, remain the same. It is therefore the topic of future work to investigate the integration of these algebras into our formulation. The benefit of this would be a more versatile and generic modeling of surfaces that can be exploited for various manipulation tasks.

A possible extension and application of this work would be grasping and in-hand manipulation. Using the geometric representations and the corresponding optimization functions presented in this we can actually very easily derive a model for grasping in geometric algebra. The three contact types point, line and plane can directly be represented as geometric primitives. In most cases the contact points are surface points of objects. Especially the most commonly used point-on-plane model, which is always stable.

### REFERENCES

- [1] M. Kamarianakis and G. Papagiannakis, "An All-In-One Geometric Algorithm for Cutting, Tearing, and Drilling Deformable Models," *Adv. Appl. Clifford Algebras*, no. 31, Jul. 6, 2021.
- [2] S. Breuils, K. Tachibana, and E. Hitzer, "New Applications of Clifford's Geometric Algebra," *Adv. Appl. Clifford Algebras*, vol. 32, no. 2, p. 17, Apr. 2022.
- [3] P. Joot, *Geometric Algebra for Electrical Engineers*. CreateSpace Independent Publishing Platform, 2019.
- [4] D. Hestenes, G. Sobczyk, and J. S. Marsh, "Clifford Algebra to Geometric Calculus. A Unified Language for Mathematics and Physics," *American Journal of Physics*, vol. 53, no. 5, pp. 510–511, May 1985.
- [5] E. Bayro-Corrochano, "A Survey on Quaternion Algebra and Geometric Algebra Applications in Engineering and Computer Science 1995–2020," *IEEE Access*, vol. 9, pp. 104 326–104 355, 2021.
- [6] L. Kavan, S. Collins, C. O'Sullivan, and J. Zara, "Dual Quaternions for Rigid Transformation Blending," Trinity College, Dublin, Ireland, Technical Report, 2006, p. 11.
- [7] G. Leclercq, P. Lefèvre, and G. Blohm, "3D kinematics using dual quaternions: Theory and applications in neuroscience," *Front. Behav. Neurosci.*, vol. 7, 2013.
- [8] F. F. Afonso Silva, J. José Quiroz-Omaña, and B. Vilhena Adorno, "Dynamics of Mobile Manipulators Using Dual Quaternion Algebra," *Journal of Mechanisms and Robotics*, vol. 14, no. 6, Sep. 14, 2022.
- [9] M. d. P. A. Fonseca, B. V. Adorno, and P. Fraisse, "Coupled Task-Space Admittance Controller Using Dual Quaternion Logarithmic Mapping," *IEEE Robotics and Automation Letters*, vol. 5, no. 4, pp. 6057–6064, Oct. 2020.
- [10] M. M. Marinho, L. F. C. Figueredo, and B. V. Adorno, "A dual quaternion linear-quadratic optimal controller for trajectory tracking," in *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, Sep. 2015, pp. 4047–4052.
- [11] M. M. Marinho, B. V. Adorno, K. Harada, and M. Mitsuishi, "Dynamic Active Constraints for Surgical Robots Using Vector-Field Inequalities," *IEEE Trans. Robot.*, vol. 35, no. 5, pp. 1166–1185, Oct. 2019.
- [12] S. Calinon, "Gaussians on Riemannian Manifolds: Applications for Robot Learning and Adaptive Control," *IEEE Robotics Automation Magazine*, vol. 27, no. 2, pp. 33–45, Jun. 2020.
- [13] N. Jaquier, L. Rozo, D. G. Caldwell, and S. Calinon, "Geometry-aware manipulability learning, tracking, and transfer," *The International Journal of Robotics Research*, vol. 40, no. 2-3, pp. 624–650, Feb. 2021.
- [14] F. Marić, L. Petrović, M. Guberina, J. Kelly, and I. Petrović, "A Riemannian metric for geometry-aware singularity avoidance by articulated robots," *Robotics and Autonomous Systems*, vol. 145, p. 103 865, Nov. 2021.
- [15] F. Marić, M. Giamou, A. W. Hall, S. Khoubyarian, I. Petrovic, and J. Kelly, "Riemannian Optimization for Distance-Geometric Inverse Kinematics," *IEEE Trans. Robot.*, vol. 38, no. 3, pp. 1703–1722, Jun. 2022.
- [16] M. C. L. Belon, "Applications of Conformal Geometric Algebra in Mesh Deformation," in *2013 XXVI Conference on Graphics, Patterns and Images, Arequipa, Peru: IEEE*, Aug. 2013, pp. 39–46.
- [17] H. Hadfield, S. Achawal, J. Lasenby, A. Lasenby, and B. Young, "Exploring Novel Surface Representations via an Experimental Ray-Tracer in CGA," *Adv. Appl. Clifford Algebras*, vol. 31, no. 2, p. 16, Apr. 2021.
- [18] W. B. Lopes and C. G. Lopes, "Geometric-Algebra Adaptive Filters," *IEEE Trans. Signal Process.*, vol. 67, no. 14, pp. 3649–3662, Jul. 15, 2019.
- [19] Y. He, R. Wang, X. Wang, J. Zhou, and Y. Yan, "Novel Adaptive Filtering Algorithms Based on Higher-Order Statistics and Geometric Algebra," *IEEE Access*, vol. 8, pp. 73 767–73 779, 2020.
- [20] A. Aristidou and J. Lasenby, "Inverse Kinematics Solutions Using Conformal Geometric Algebra," in *Guide to Geometric Algebra in Practice*, L. Dorst and J. Lasenby, Eds., London: Springer London, 2011, pp. 47–62.
- [21] A. Aristidou, Y. Chrysanthou, and J. Lasenby, "Extending FABRIK with model constraints," *Comp. Anim. Virtual Worlds*, vol. 27, no. 1, pp. 35–57, Jan. 2016.
- [22] D. Kolpashchikov, O. Gerget, and V. Danilov, "FABRIKx: Tackling the Inverse Kinematics Problem of Continuum Robots with Variable Curvature," *Robotics*, vol. 11, no. 6, p. 128, 6 Dec. 2022.
- [23] I. Zaplana, H. Hadfield, and J. Lasenby, "Closed-form solutions for the inverse kinematics of serial robots using conformal geometric algebra," *Mechanism and Machine Theory*, vol. 173, 2022.
- [24] E. Bayro-Corrochano and J. Zamora-Esquivel, "Differential and inverse kinematics of robot devices using conformal geometric algebra," *Robotica*, vol. 25, no. 1, pp. 43–61, Jan. 2007.
- [25] H. Hadfield and J. Lasenby, "Constrained Dynamics in Conformal and Projective Geometric Algebra," in *Advances in*

- Computer Graphics*, ser. Lecture Notes in Computer Science, N. Magnenat-Thalmann, C. Stephanidis, E. Wu, *et al.*, Eds., vol. 12221, Cham: Springer International Publishing, 2020, pp. 459–471.
- [26] E. Bayro-Corrochano, “Robot Modeling and Control Using the Motor Algebra Framework,” in *2019 12th International Workshop on Robot Motion and Control (RoMoCo)*, Jul. 2019, pp. 1–8.
- [27] C. A. Arellano-Muro, G. Osuna-González, B. Castillo-Toledo, and E. Bayro-Corrochano, “Newton–Euler Modeling and Control of a Multi-copter Using Motor Algebra,” *Adv. Appl. Clifford Algebras*, vol. 30, no. 2, p. 19, Apr. 2020.
- [28] E. Bayro-Corrochano, A. M. Garza-Burgos, and J. L. Del-Valle-Padilla, “Geometric Intuitive Techniques for Human Machine Interaction in Medical Robotics,” *Int J of Soc Robotics*, vol. 12, no. 1, pp. 91–112, Jan. 2020.
- [29] L. González-Jiménez, O. Carbajal-Espinosa, A. Loukianov, and E. Bayro-Corrochano, “Robust Pose Control of Robot Manipulators Using Conformal Geometric Algebra,” *Adv. Appl. Clifford Algebras*, vol. 24, no. 2, pp. 533–552, Jun. 2014.
- [30] J. Zamora-Esquivel and E. Bayro-Corrochano, “Robot Object Manipulation Using Stereoscopic Vision and Conformal Geometric Algebra,” *Applied Bionics and Biomechanics*, vol. 8, no. 3-4, pp. 411–428, 2011.
- [31] L. A. F. Fernandes, “Exploring Lazy Evaluation and Compile-Time Simplifications for Efficient Geometric Algebra Computations,” in *Systems, Patterns and Data Engineering with Geometric Calculi*, ser. SEMA SIMAI Springer Series, S. Xambó-Descamps, Ed., vol. 13, Cham: Springer International Publishing, 2021, pp. 111–131.
- [32] S. Breuils, V. Nozick, and L. Fuchs, “Garamon: A Geometric Algebra Library Generator,” *Adv. Appl. Clifford Algebras*, vol. 29, no. 4, p. 69, Jul. 22, 2019.
- [33] D. Fontijne, “Gaijen 2:: A geometric algebra implementation generator,” in *Proceedings of the 5th International Conference on Generative Programming and Component Engineering - GPCE '06*, Portland, Oregon, USA: ACM Press, 2006, p. 141.
- [34] E. V. Sousa and L. A. F. Fernandes, “TbGAL: A Tensor-Based Library for Geometric Algebra,” *Adv. Appl. Clifford Algebras*, vol. 30, no. 2, p. 27, Apr. 2020.
- [35] J. Ong, *GAL*, <https://github.com/jeremyong/gal>: GitHub, 2019.
- [36] P. Colapinto, “Vorsor: Spatial computing with conformal geometric algebra,” University of California at Santa Barbara, 2011.
- [37] B. V. Adorno and M. Marques Marinho, “DQ Robotics: A Library for Robot Modeling and Control,” *IEEE Robotics Automation Magazine*, vol. 28, no. 3, pp. 102–116, Sep. 2021.
- [38] E. Bayro-Corrochano, *Geometric Algebra Applications Vol. II: Robot Modelling and Control*. Cham: Springer International Publishing, 2020.
- [39] D. Hestenes and G. Sobczyk, *Clifford Algebra to Geometric Calculus*. Dordrecht: Springer Netherlands, 1984.
- [40] A. Macdonald, “A Survey of Geometric Algebra and Geometric Calculus,” *Adv. Appl. Clifford Algebras*, vol. 27, no. 1, pp. 853–891, Mar. 2017.
- [41] C. Gunn, “Geometric Algebras for Euclidean Geometry,” *Adv. Appl. Clifford Algebras*, vol. 27, no. 1, pp. 185–208, Mar. 2017.
- [42] T.-A. Johansen, J. J. C. Sanchez, and R. Kristiansen, “Dual quaternion control: A review of recent results within motion control,” *Nonlinear Studies*, vol. 26, no. 4, p. 25, 2019.
- [43] E. Bayro-Corrochano, *Geometric Algebra Applications Vol. I*. Cham: Springer International Publishing, 2019.
- [44] J. Zamora-Esquivel, “G 6,3 Geometric Algebra; Description and Implementation,” *Adv. Appl. Clifford Algebras*, vol. 24, no. 2, pp. 493–514, Jun. 2014.
- [45] S. Breuils, V. Nozick, A. Sugimoto, and E. Hitzer, “Quadric Conformal Geometric Algebra of R9,6,” *Adv. Appl. Clifford Algebras*, vol. 28, no. 2, p. 35, May 2018.
- [46] E. J. Bayro-Corrochano, G. Altamirano-Escobedo, A. Ortiz-Gonzalez, V. Farias-Moreno, and N. Chel-Puc, “Computing in the Conformal Space Objects, Incidence Relations, and Geometric Constrains for Applications in AI, GIS, Graphics, Robotics, and Human-Machine Interaction,” *IEEE Access*, vol. 10, pp. 112 742–112 756, 2022.
- [47] C. Perwass, *Geometric Algebra with Applications in Engineering (Geometry and Computing 4)*. Berlin: Springer, 2009, 385 pp.
- [48] E. Hitzer, C. LAVOR, and D. Hildenbrand, “Current survey of Clifford geometric algebra applications,” *Math Methods in App Sciences*, mma.8316, Apr. 29, 2022.
- [49] B. V. Adorno, “Two-arm Manipulation: From Manipulators to Enhanced Human-Robot Collaboration,” Ph.D. dissertation, Université Montpellier II - Sciences et Techniques du Languedoc, 2011.
- [50] L. Tingelstad, “Automatic Differentiation and Optimization of Multivectors: Estimating Motors in Conformal Geometric Algebra,” Ph.D. dissertation, NTNU, 2017.
- [51] L. Tingelstad and O. Egeland, “Motor Parameterization,” *Adv. Appl. Clifford Algebras*, vol. 28, no. 2, p. 34, May 2018.
- [52] Y. Tassa, T. Erez, and E. Todorov, “Synthesis and stabilization of complex behaviors through online trajectory optimization,” in *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*, Oct. 2012, pp. 4906–4913.
- [53] B. Siciliano, L. Sciavicco, L. Villani, and G. Oriolo, *Robotics (Advanced Textbooks in Control and Signal Processing)*, red. by M. J. Grimble and M. A. Johnson. London: Springer London, 2009.
- [54] C. Doran and A. Lasenby, *Geometric Algebra for Physicists*, 1st ed. Cambridge University Press, May 29, 2003.
- [55] J. Hwangbo, J. Lee, and M. Hutter, “Per-Contact Iteration Method for Solving Contact Dynamics,” *IEEE Robot. Autom. Lett.*, vol. 3, no. 2, pp. 895–902, Apr. 2018.
- [56] J. Carpentier, G. Saurel, G. Buondonno, *et al.*, “The Pinocchio C++ library : A fast and flexible implementation of rigid body dynamics algorithms and their analytical derivatives,” in *2019 IEEE/SICE International Symposium on System Integration (SII)*, Paris, France: IEEE, Jan. 2019, pp. 614–619.
- [57] R. Smits, *KDL: Kinematics and Dynamics Library*, <http://www.orocos.org/kdl>.

## APPENDIX

### A. Structure of a Multivector in Conformal Geometric Algebra

Conformal geometric algebra has 32 basis blades, following the rule  $k = 2^{r+p+q}$ . Grade 5 is the highest grade of CGA, consequently that makes  $e_{0123\infty}$  the pseudoscalar of the algebra. In practice the multivectors are sparse and usually at most 10 elements are non-zero. We call the vector containing the known non-zero blades of a multivector its parameter vector. Note that the grade 0 element is a scalar which means that vectors and matrices known from linear algebra are actually part of this algebra and can therefore be seamlessly multiplied with multivector matrices.

### B. Geometric Primitives in Conformal Geometric Algebra

Table II shows the geometric primitives that are available in conformal geometric algebra. We define the outer product nullspace as the primal representation, because of its more convenient construction of the primitives. Note that all primitives can be used as the argument of the sandwich

grade 0	1
grade 1	$e_1, e_2, e_3, e_\infty, e_0$
grade 2	$e_{23}, e_{13}, e_{12}, e_{1\infty}, e_{2\infty}, e_{3\infty}, e_{01}, e_{02}, e_{03}, e_{0\infty}$
grade 3	$e_{123}, e_{12\infty}, e_{13\infty}, e_{23\infty}, e_{012}, e_{013}, e_{023}, e_{01\infty}, e_{02\infty}, e_{03\infty}$
grade 4	$e_{123\infty}, e_{0123}, e_{012\infty}, e_{023\infty}, e_{013\infty}$
grade 5	$e_{0123\infty}$

TABLE I: Basis blades of conformal geometric algebra.

product  $MX\widetilde{M}$ , i.e. applying rigid body transformations to the primitives. Higher dimensional algebras such as  $\mathbb{G}_{9,6}$  extend these primitives by quadric surfaces such as ellipsoids and hyperboloids. There are several geometric operations that

	OPNS (primal)	IPNS (dual)
Point $P$	$\mathcal{C}(\mathbf{x})$	$\mathcal{C}(\mathbf{x})$
Point Pair $A$	$P_1 \wedge P_2$	$S_1 \wedge S_2 \wedge S_3$
Sphere $S$	$P_1 \wedge P_2 \wedge P_3 \wedge P_4$	$P - \frac{1}{2}\rho^2 e_\infty$
Plane $E$	$P_1 \wedge P_2 \wedge P_3 \wedge e_\infty$	$\mathbf{x} + \frac{1}{2}\mathbf{x}^2 e_\infty - \frac{1}{2}\rho^2 e_\infty$
Line $L$	$P_1 \wedge P_2 \wedge e_\infty$	$E_1 \wedge E_2$
Circle $C$	$P_1 \wedge P_2 \wedge P_3$	$S_1 \wedge S_2$

TABLE II: Geometric primitives in CGA [47]

allow for reasoning about the relationships between primitives such as projections and intersections. The latter can actually be found as well in the construction of the geometric primitives, for example a circle in its IPNS representation is constructed as the outer product of two spheres, i.e. the intersection of two spheres.

### C. Embedding

This section explains the embedding function  $\mathcal{E}[\mathcal{X}]$  that is used to obtain the non-trivial parameter matrix of a multivector matrix. Suppose you have an arbitrary multivector matrix  $\mathcal{X} \in \mathbb{R}^{I \times J}$  with elements  $X_{ij}$  that have  $K$  known non-trivial blades  $e_k$ . The resulting parameter matrix then is of size  $IK \times J$ , i.e. the parameter vectors of each multivector element get expanded along the columns of the matrix. The embedding function  $\mathcal{E}$  is therefore defined as

$$\mathbf{X} = \mathcal{E}[\mathcal{X}] = \begin{bmatrix} X_{11,1} & \cdots & X_{1J,1} \\ \vdots & \ddots & \vdots \\ X_{11,K} & \cdots & X_{1J,K} \\ \vdots & \ddots & \vdots \\ X_{I1,K} & \cdots & X_{IJ,K} \\ \vdots & \ddots & \vdots \\ X_{I1,K} & \cdots & X_{IJ,K} \end{bmatrix}. \quad (60)$$

### D. Derivation of the Jacobian of the Motor Logarithmic Map

From Equation (14) we know that  $B = \log(M)$ . We define the parameters of the motor and bivector as follows

$$M = m_1 + m_2 e_{23} + m_3 e_{13} + m_4 e_{12} + m_5 e_{1\infty} + m_6 e_{2\infty} + m_7 e_{3\infty} + m_8 e_{123\infty}, \quad (61)$$

and

$$B = b_1 e_{23} + b_2 e_{13} + b_3 e_{12} + b_4 e_{1\infty} + b_5 e_{2\infty} + b_6 e_{3\infty}. \quad (62)$$

Standard results show that the motor  $M$  can be split into a rotor  $R$  and a translator  $T$ , such that  $M = TR$

$$R = -e_0 \cdot M e_\infty, \quad (63)$$

$$T = M \widetilde{R}. \quad (64)$$

Using the Equations (10) and (9) it becomes straightforward to derive the bivector components  $b_i$  in function of the motor components  $m_i$

$$b_1 = -m_2 \frac{2 \cos^{-1}(m_1)}{\sin(\cos^{-1}(m_1))}, \quad (65)$$

$$b_2 = -m_3 \frac{2 \cos^{-1}(m_1)}{\sin(\cos^{-1}(m_1))}, \quad (66)$$

$$b_3 = -m_4 \frac{2 \cos^{-1}(m_1)}{\sin(\cos^{-1}(m_1))}, \quad (67)$$

$$b_4 = -2(m_1 m_5 + m_4 m_6 + m_3 m_7 + m_2 m_8), \quad (68)$$

$$b_5 = -2(-m_4 m_5 + m_1 m_6 + m_2 m_7 - m_3 m_8), \quad (69)$$

$$b_6 = -2(-m_3 m_5 - m_2 m_6 + m_1 m_7 + m_4 m_8). \quad (70)$$

The Jacobian of the motor logarithmic map can be found as the partial derivatives of the bivector components  $b_i$  w.r.t the motor components  $m_i$ , i.e.

$$\mathbf{J}_{\mathcal{M} \rightarrow \mathbb{B}}(M) = \begin{bmatrix} \frac{\partial b_1}{\partial m_1} & \cdots & \frac{\partial b_1}{\partial m_8} \\ \vdots & \ddots & \vdots \\ \frac{\partial b_6}{\partial m_1} & \cdots & \frac{\partial b_6}{\partial m_8} \end{bmatrix}. \quad (71)$$

Using the Equations (65) the non-trivial partial derivatives can be found to be

$$\frac{\partial b_1}{\partial m_1} = -2m_2 \left( \frac{1}{m_1^2 - 1} + m_1 \cos^{-1}(m_1) \right), \quad (72)$$

$$\frac{\partial b_2}{\partial m_1} = -2m_3 \left( \frac{1}{m_1^2 - 1} + m_1 \cos^{-1}(m_1) \right), \quad (73)$$

$$\frac{\partial b_3}{\partial m_1} = -2m_4 \left( \frac{1}{m_1^2 - 1} + m_1 \cos^{-1}(m_1) \right), \quad (74)$$

$$\frac{\partial b_1}{\partial m_2} = \frac{\partial b_2}{\partial m_3} = \frac{\partial b_3}{\partial m_4} = \frac{-2 \cos^{-1}(m_1)}{\sin(\cos^{-1}(m_1))}, \quad (75)$$

$$\frac{\partial b_4}{\partial m_1} = -\frac{\partial b_5}{\partial m_4} = -\frac{\partial b_6}{\partial m_3} = -2m_5, \quad (76)$$

$$\frac{\partial b_4}{\partial m_2} = -\frac{\partial b_5}{\partial m_3} = \frac{\partial b_6}{\partial m_4} = -2m_8, \quad (77)$$

$$\frac{\partial b_4}{\partial m_3} = \frac{\partial b_5}{\partial m_2} = \frac{\partial b_6}{\partial m_1} = -2m_7, \quad (78)$$

$$\frac{\partial b_4}{\partial m_4} = \frac{\partial b_5}{\partial m_1} = -\frac{\partial b_6}{\partial m_2} = -2m_6, \quad (79)$$

$$\frac{\partial b_4}{\partial m_5} = \frac{\partial b_5}{\partial m_6} = \frac{\partial b_6}{\partial m_7} = -2m_1, \quad (80)$$

$$\frac{\partial b_4}{\partial m_6} = -\frac{\partial b_5}{\partial m_5} = \frac{\partial b_6}{\partial m_8} = -2m_4, \quad (81)$$

$$\frac{\partial b_4}{\partial m_7} = -\frac{\partial b_5}{\partial m_8} = -\frac{\partial b_6}{\partial m_5} = -2m_3, \quad (82)$$

$$\frac{\partial b_4}{\partial m_8} = \frac{\partial b_5}{\partial m_7} = -\frac{\partial b_6}{\partial m_6} = -2m_2, \quad (83)$$

which concludes the derivation.